

东莞市志展五金塑胶制品有限公司

DongGuan ZhiZhan Hardware Plastic Products Co., LTD

TEL:0769-81802125

FAX:0769-81802126

DOCUMENT NO.

RDE0284A





SERIAL NO.

C1251H00-NP

Material: PBT UL 94V-0




NOTE:

Current rating:3A AC,DC
Voltage rating:250V AC,DC
Temperature range:-25° C~+85° C
Contact resistance:20m Max.
Insulation resistance:1000M Min.
Withstanding voltage:800V AC/minute
Material:PBT+15GF
Color:White




PAR NO	Dimenslons	
NO NARK	A	B
C1251H00-1*2P	1.25	4.25
C1251H00-1*3P	2.50	5.50
C1251H00-1*4P	3.75	6.75
C1251H00-1*5P	5.00	8.00
C1251H00-1*6P	6.25	9.25
C1251H00-1*7P	7.50	10.50
C1251H00-1*8P	8.75	11.75
C1251H00-1*9P	10.00	13.00
C1251H00-1*10P	11.25	14.25


C1251 Series 1.25mm pitch crimp terminal

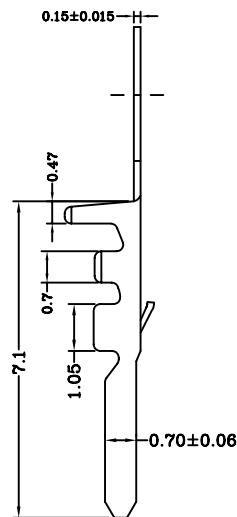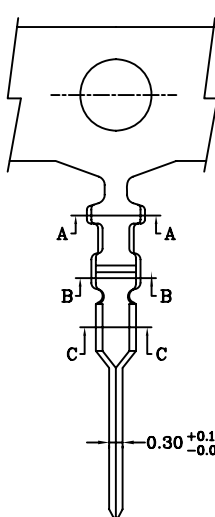

Section A-A



Section B-B



Section C-C

Specification & Ordering Information:

Part No	Wire Range	Insulation O.D.	Material	Finish	Qty/reel	NOTE
C1251TOP-2	AWG #28~#32	1.0mm(max)	Phosphor bronze	Tin-plated	20,000 pcs	e:Stamping before tin plated
C1251TOP-2E	AWG #28~#32	1.0mm(max)	Phosphor bronze	Tin-plated	20,000 pcs	